


Features

Operating 20.0 m – 30.0 m EL Wire or 400 cm² – 600 cm² EL sheet

- Operated by 12V DC (Input)
- Operation Modes: Continuous and Flashing
- Slide Switch Mode Selection
- Input Socket for AC/DC Adaptor
- LED Power Indicator
- Surface Mountable with screws or adhesive
- Low Power Consumption
- Low Audible Operation Noise
- Low Heat Generating

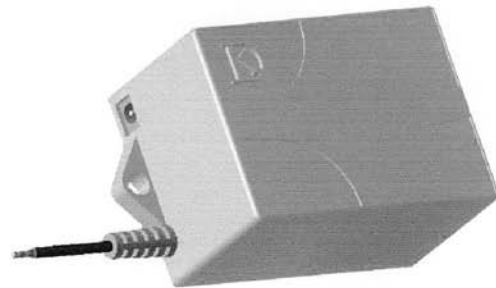

Electrical Specifications

- Input Voltage: 12.0 -13.0 (VDC)
- Current Range: 400 ÷ 520 (mA)
- Output Freq.: 2.3 ÷ 1.8 (KHz)
- Output Volt.: 100 ÷ 110 (Vrms)
- EL Wire Length: 20.0 – 30.0 m

General Specifications

- Dimensions (LxWxH): 60 x 42 x 30 (mm)
- Weight: 60 g
- Operating Temp: -10 ÷ 60 (°C)
- Storage Temperature: -20 ÷ 65 (°C)

Versions:

- KD-30A:
- KD-30B: With Plug-In Accessory

